

**SUS 304
Material**



**High Efficiency
Motor**



**Industry
Grade**



**Quiet
Operation**



**Heavy
Duty**



PSGJ Series

**Stainless Steel
Self Priming Jet Pump**



Scan for more
information
potenza2u.com

Reliability Driven by Innovation

PSGJ Series

Stainless Steel Self Priming
Jet Pump



INTRODUCTION

- Suitable for domestic water boosting, water delivery, irrigation, and pumping well water

OPERATING CONDITIONS

- Liquid temperature up to 60°C
Ambient temperature up to 40°C

PUMP

- Pump body: Stainless Steel SUS 304
- Impeller: Brass
- Shaft: AISI 304


PUMP

- Duty S1, Insulation Class B, IP 44
- Single phase: 240v/1ph/50Hz
- Aluminium Housing
- 100% full copper

>> SPECIFICATION

Model		Power		Current Amp				Q(m3/h-1/min)							
Single Phase 240V /50HZ	Three Phase 415V/50HZ	kW	HP	1x240V	3x415V	Max Suction (m)	H-Max m	0	0	0.6	0.9	1.2	1.5	2.0	2.5
								0	0	10	15	20	25	33	42
								Head(m)							
PSGJ-800		0.8	1.1	3.8		9		0	48	37	35	31	27	13	5.3

>> DIMENSION

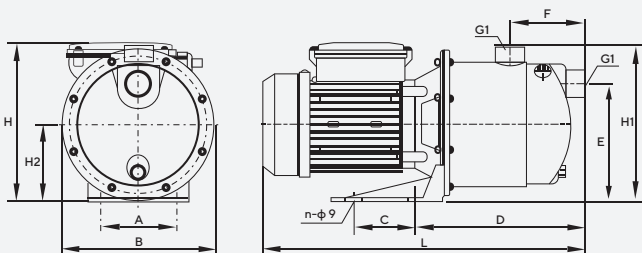

Model	Dimension (mm)									
	A	B	D	E	F	L	H	H1	H2	n
PSGJ-800	98	184	160	148	80	354	205	202	98	2